


Thermal Systems

Duplex Rail Connector



The new Duplex rail connector can be used to connect two products, which are equipped with the asa rail system. A connection of two standard rail system coolers can be very beneficial to easily, double the cooling performance, while using the same parts. The logistic and documentation work can be minimized at the OEM's premise as well as at the end customers belongings (e.g. manuals, spare part lists,...). Contact us to discover the full potential and available options for this system, support@asahydraulik.com.

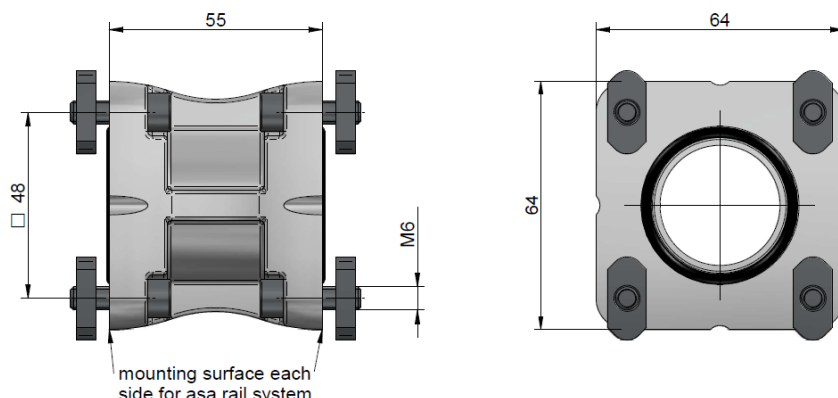

Technical Data

order number	description	connector material	o-ring	weight
				[kg]
ILLZSET5032K	connector TT rail duplex kit	aluminium	NBR, 35 x 3 mm	0,80kg

Content

connector	2x
o-ring	4x
screw M6x20	16x
slot nut	16x

Fits On Cooler Type

TT 05, 07, 11, 13, 16, 21, 25, 36



Typical connection application:

requires
2 x Standard Rail system coolers
1 x ILLZSETSG25
1 x ILLZSET5032K

